


Fitting for 2 top-running glass doors up to 36 kg (79 lbs.), with screwed on or groove mounted running track. With soft and self closing mechanism. Design Inslide.


Product highlights



Quiet, smooth running and soft and self closing system for different door weights



No groove in the base and invisible technology

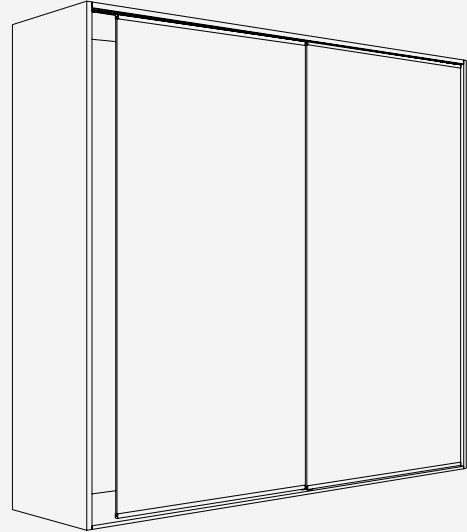

Technical specifications



36 kg (79 lbs.)



2000 mm (6'6 3/4")






1000 mm (3'3 3/8")



Installation examples






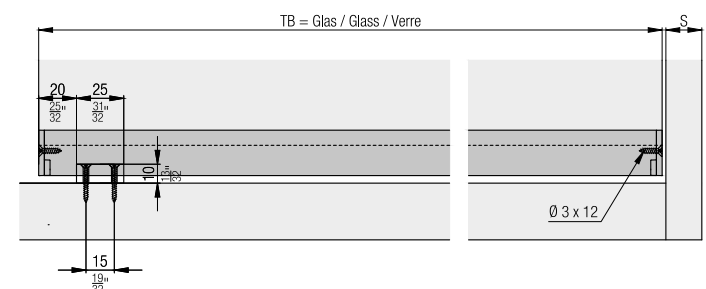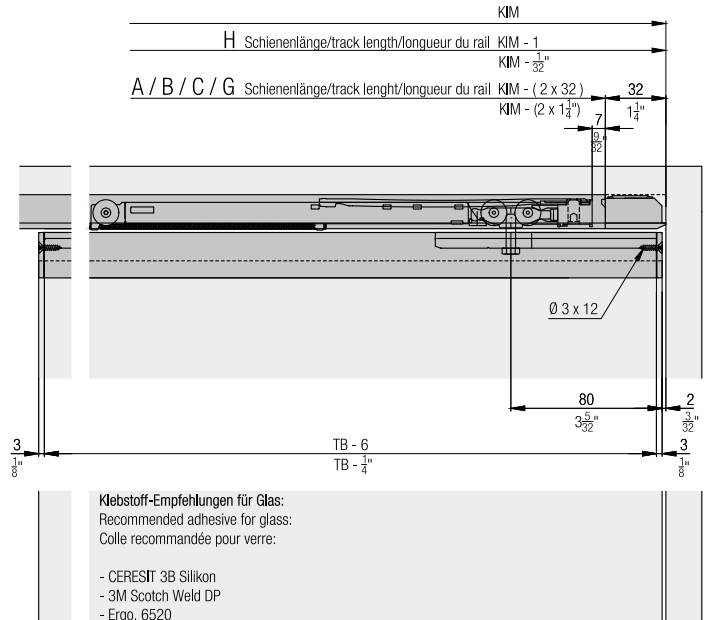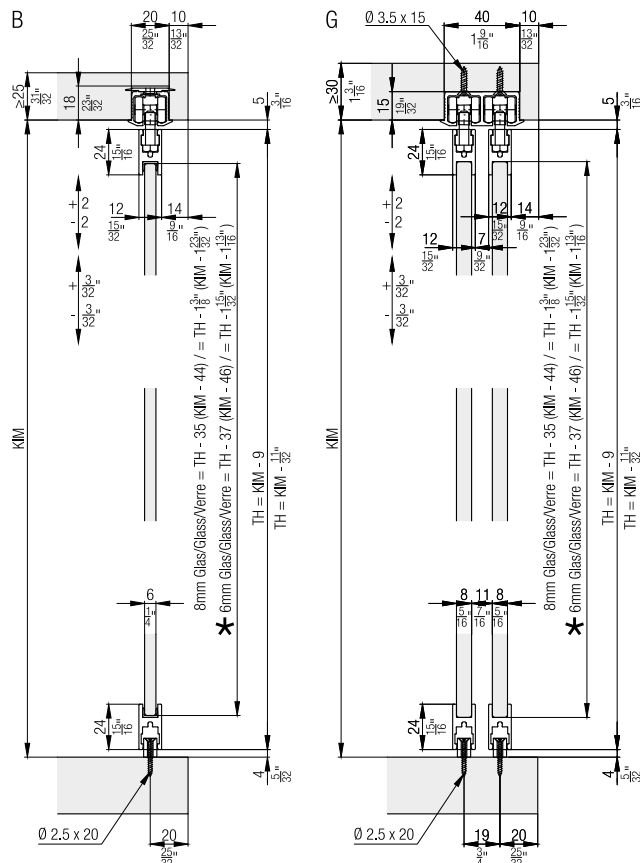

- * Zentrierhilfe für 6mm Glas
Centering help for 6mm glass
Aide de centrage pour verre 6mm




**Set for 1 glass door up to 36 kg (79 lbs.),
with height adjustment**

	No.
Hawa Clipo 36 GPPK, for 1 door	053.3361.072


Set consisting of:

		053.3361.072	No.
	Running gear	2	053.3344.071
	Flat countersunk head chipboard screw, 3x12 mm (1/8" x 15/32"), steel, zinc-plated, black	5	600.0000.703
	Stopper, plastic, gray	2	057.3148.071
	Centring help, for 6 mm (1/4") glass	8	053.3139.001
	End cover	3	053.0329.001
	Bottom guide	1	053.0333.001
	Flat countersunk head chipboard screw 2.5x20 mm (1/8" x 25/32"), steel, zinc-plated	2	600.0000.705


Suspension and glass retaining profiles

		mm (inch)	No.
	Glass fixing profile, aluminum, anodized	2,500 (8' 2 7/16")	053.3072.250
		3,500 (11' 5 25/32")	053.3072.350
		6,000 (19' 8 7/32")	053.3072.600

Adhesive




	No.
	Glue Ceresit 3B Silicone, 310 ml 098.0027.000

Running tracks

		mm (inch)	No.
	A: Single running track, for glue fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3324.250
		3,500 (11' 5 25/32")	053.3324.350
		6,000 (19' 8 7/32")	053.3324.600
	B: Single running track, swivel lug, aluminum, anodized (not for hard wood/ MDF)	2,500 (8' 2 7/16")	053.3327.250
		3,500 (11' 5 25/32")	053.3327.350
		6,000 (19' 8 7/32")	053.3327.600
	C: Single running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3325.250
		3,500 (11' 5 25/32")	053.3325.350
		6,000 (19' 8 7/32")	053.3325.600
	G: Double running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3342.250
		3,500 (11' 5 25/32")	053.3342.350
		6,000 (19' 8 7/32")	053.3342.600
	H: Single running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3326.250
		3,500 (11' 5 25/32")	053.3326.350
		6,000 (19' 8 7/32")	053.3326.600




Track end piece set for single running tracks

	No.
Track-end section, for screw fixing, plastic, gray, 2-piece set	053.3354.071
Track-end section, swivel lug, plastic, gray, 2-piece set	053.3355.051

		053.3354.071	053.3355.051	No.
Set consisting of:				
	Track-end piece, for screw fixing, plastic	2		053.0334.001
	Chipboard screw, 4x12 mm (5/32"x15/32"), steel, zinc-plated	2		600.0000.704
	Track-end piece, with swivel lug, plastic		2	053.3351.071






Track end piece set for double running tracks

	No.
Track-end section, double track, swivel lug, plastic, gray, 2-piece set	053.3362.051
Track-end section, double track, plastic, grey, 2-piece set	053.3365.071




		053.3362.051	053.3365.071	No.
Set consisting of:				
	Track-end piece, double running track, with swivel lug, plastic	2		053.3352.071
	Track-end piece, Double running track, for screw fixing, plastic		2	053.0335.001
	Chipboard screw, 4x12 mm (5/32"x15/32"), steel, zinc-plated		4	600.0000.704

Soft close up to 15/26/36 kg (33/57/79 lbs.)


	No.
Soft close, up to 15 kg (33 lbs.)	057.3159.071
Soft close, up to 26 kg (57 lbs.)	057.3159.072
Soft close, up to 40 kg (88 lbs.)	057.3159.073

		057.3159.071	057.3159.072	057.3159.073	No.
Set consisting of:					
	Soft close, up to 15 kg (33 lbs.)	2			057.3156.071
	Release piece soft close	2	2	2	057.0182.101
	Thread rolling rounded head screw, M2.5x5 mm (3/32"x3/16"), steel, zinc-plated	2	2	2	600.0000.764
	Soft close, up to 26 kg (57 lbs.)		2		057.3156.072
	Soft close, up to 40 kg (88 lbs.)			2	057.3156.073


Handles

		No.
	Handle, for glue fixing, 64 mm (2 17/32"), plastic, chrome-plated, matt, 2-piece set	053.3323.971
	Finger-pull-handle, for glue fixing, 30 mm (1 3/16"), aluminum, anodized, 2-piece set	053.3091.982
	Finger-pull-handle, for glue fixing, 30 mm (1 3/16"), aluminum, anodized, 50-piece set	053.3091.983
	Finger-pull-handle, for glue fixing, 40 mm (1 9/16"), aluminum, anodized	053.3158.901

Accessories


		No.
	Track cleaner, plastic, red	040.3142.071

Further installation examples

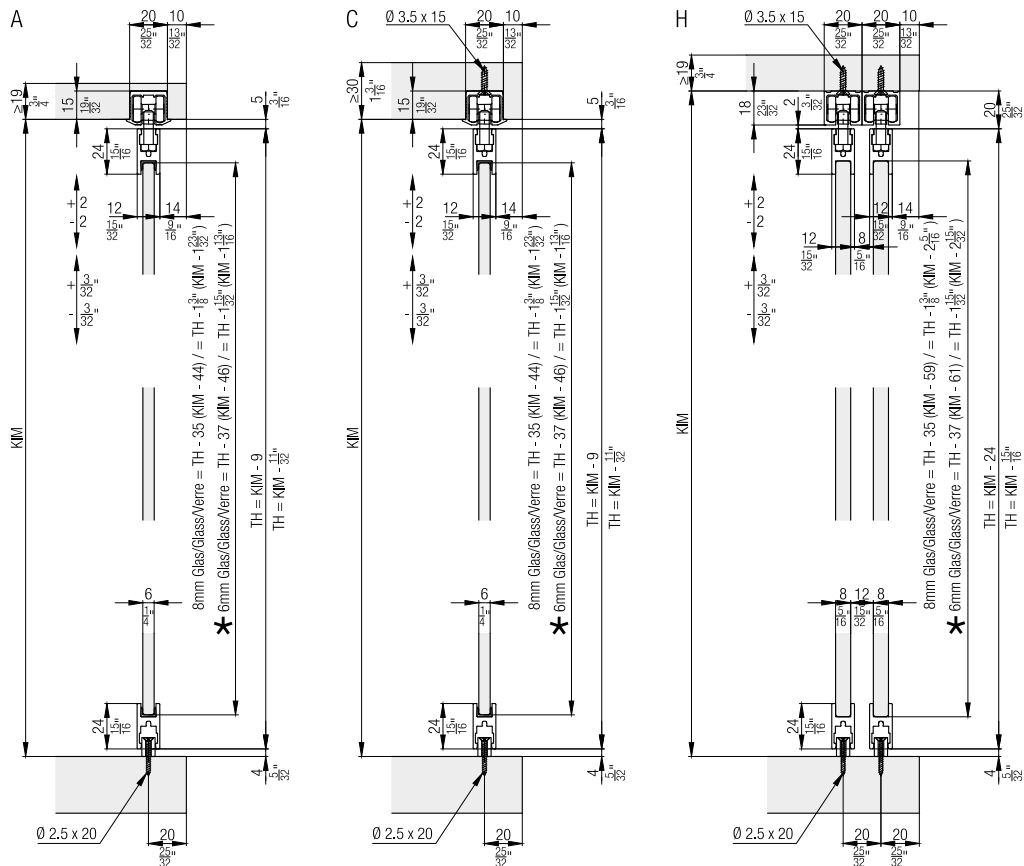


★ Zentrierhilfe für 6mm Glas
Centering help for 6mm glass
Aide de centrage pour verre 6mm

Calculations

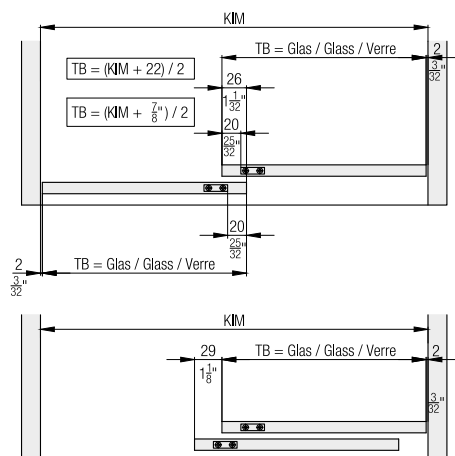

Locking systems

Details from page 272 onwards





Soft close



	Z ≥	
	1	2
Hawa Porta 40 H	1' 4 ¹⁷ / ₃₂ "	2' 0 ¹³ / ₃₂ "
Hawa Porta 40 GE	1' 2 ¹³ / ₁₆ "	1' 10 ¹¹ / ₁₆ "
Hawa Clipo 26 H IS	1' 4 ¹⁷ / ₃₂ "	2' 0 ¹³ / ₃₂ "
Hawa Clipo 26 H MS	1' 6 ¹ / ₃₂ "	2' 1 ²⁹ / ₃₂ "
Hawa Clipo 36 H IS	1' 4 ¹⁷ / ₃₂ "	2' 0 ¹³ / ₃₂ "
Hawa Clipo 36 H MS	1' 6 ¹ / ₃₂ "	2' 1 ²⁹ / ₃₂ "
Hawa Clipo 36 HM IS	1' 4 ¹⁷ / ₃₂ "	2' 0 ¹³ / ₃₂ "
Hawa Clipo 26 GR IS	1' 4 ¹⁷ / ₃₂ "	2' 0 ¹³ / ₃₂ "
Hawa Clipo 36 G IS	1' 4 ¹⁷ / ₃₂ "	2' 0 ¹³ / ₃₂ "
Hawa Clipo 36 GPK IS	1' 4 ¹⁷ / ₃₂ "	2' 0 ¹³ / ₃₂ "
Hawa Clipo 36 GPPK IS	1' 4 ¹⁷ / ₃₂ "	2' 0 ¹³ / ₃₂ "
Hawa Regal C 26 HM IS	1' 4 ¹⁷ / ₃₂ "	2' 0 ¹³ / ₃₂ "
Hawa Regal C 26 GR IS	1' 3 ³ / ₄ "	1' 11 ⁵ / ₈ "

	Z ≥	
	1	2
Hawa Porta 40 H	420	620
Hawa Porta 40 GE	376	576
Hawa Clipo 26 H IS	420	620
Hawa Clipo 26 H MS	458	658
Hawa Clipo 36 H IS	420	620
Hawa Clipo 36 H MS	458	658
Hawa Clipo 36 HM IS	420	620
Hawa Clipo 26 GR IS	420	620
Hawa Clipo 36 G IS	420	620
Hawa Clipo 36 GPK IS	420	620
Hawa Clipo 36 GPPK IS	420	620
Hawa Regal C 26 HM IS	420	620
Hawa Regal C 26 GR IS	400	600

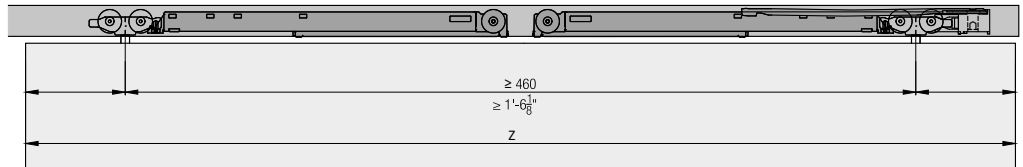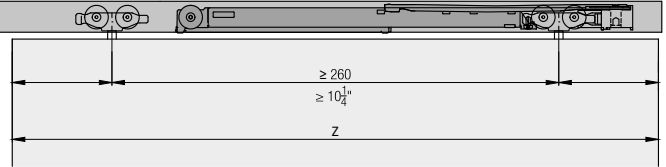

Accessories

- Locking systems from page 272
- Glass recommendations from page 280

Planning/execution

Further information about the product can be found on www.hawa.com.