
Fitting for pivoting, folding, and lateral sliding in of wooden doors up to 25 kg per door. Enables multi-functional room design, paired with a flush-fitting design.

Installation examples Front-hung cabinet fronts with base profile, 2 and 4 doors 2<mark>15</mark>"(≥1<u>8</u>") [≥40 0 - 0)¹¹8 110 Ø 5 x 35 $4\frac{11}{32}$ 1<u>-1</u>-120 <u>Ø 4.5 x 2</u>0 5" ₽ 击 $\begin{array}{ccc} 20 & (\geq 19) \\ \hline 25^{"} & (\geq \frac{3}{4}) \end{array}$ <u>(19 - 26)</u> 20 25 32 $(\frac{3}{4}$ "- $1\frac{1}{32}$ ") Ø 4.5 x 20 Ø 4.5 x 20 2 -B 18 32 ol∉ 3.0 23 32 2

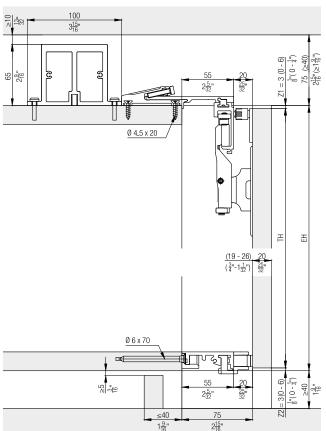

The entire furniture front can be folded and slid in Supports trends in modern interior design towards flush-fitting, floor-to-ceiling and accessible solutions

Technical specifications


Product highlights


Comfort

Aesthetics

\triangle	Max.	25 kg (55 lbs.)
$\stackrel{\wedge}{\downarrow}$		1250–2600 mm (4'1 7/32'' to 8'6 3/8'')
$\stackrel{\leftarrow}{=}$		300–700 mm (11 13/16'' to 2'3 9/16'')
→∏←		19–26 mm (3/4'' to 1 1/32'')

easily with one hand



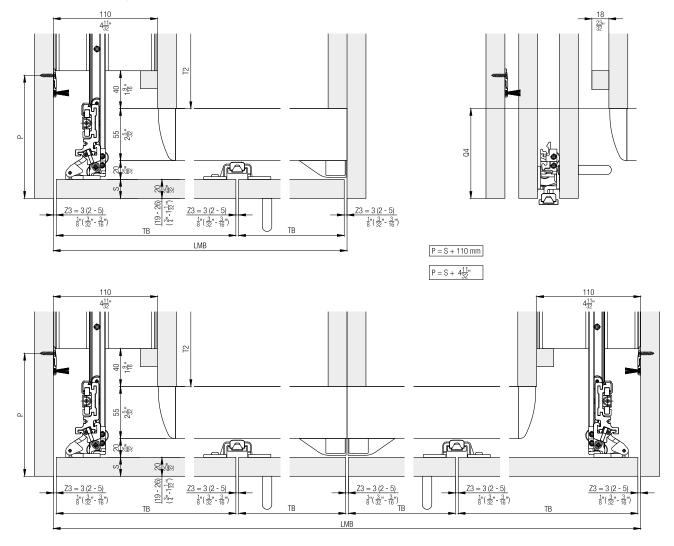


Systems with base profile, 2 and 4 doors

Set consisting of:

Set for 1 pair of folding doors, door height 1250 to 1850 mm (4'1 7/32" to 6' 27/32")

	No.
Hawa Folding Concepta 25, left, aluminum, anodized, for 1 pair of folding doors	27636
Hawa Folding Concepta 25, right, aluminum, anodized, for 1 pair of folding doors	27637
Hawa Folding Concepta 25, left, aluminum, black anodized, for 1 pair of folding doors	27640
Hawa Folding Concepta 25, right, aluminum, black anodized, for 1 pair of folding doors	27641






Table continued from previous column

No.

27640

27641

27636 27637

1 | 1 | 1 | 1

1 | 1 | 1 | 1

1 | 1 | 1 | 1

1

1 | 1 | 1 | 1

1 | 1 | 1 | 1

1 | 1 | 1 | 1

1

1 | 1 | 1 | 1

1

1 | 1 | 1 | 1

1 | 1 | 1

1

1 | 1 | 1

Scissor action, complete, 900

mm (2'11 7/16"), steel, zinc-plated Two-wheeled running gear,

height-adjustable, zinc-plated matt Single-wheeled

running gear, for

press-fit cup, matt

folding door, nickel-plated Concealed

nickel-plated Concealed hinge with damper,

nickel-plated, 3 pieces Concealed centre hinge,

steel, dull nickel finish, 3 pieces Set of screws for concealed

steel, zinc-plated

Rear scissor guide, aluminum,

Front scissor

Upright, 1800 mm (5'10 7/8"),

guide, aluminum,

anodized

anodized

aluminum,

anodized

hinges, PH 4x20 mm (25/32") Rear scissor bearing, left,

24087		Connector connecting profile, bottom left/top right, 500 mm (1'7 11/16"),	1	1	1	1	24170
24686		aluminum, anodized					
24054		Connector connecting profile, bottom right/top left, 500 mm	1	1	1	1	24171
23409		(1'7 11/16"), aluminum, anodized					
27654		Interior connector, bottom left, 645 mm (2'1 13/32"), aluminum,	1		1		24021
24088		anodized					
25936		Interior connector, top left, 645 mm (2'1 13/32"), aluminum, anodized	1		1		24107
24117		Exterior connector, bottom left/ top right, 645 mm	1	1	1	1	24027
25600		(2'1 13/32"), aluminum, anodized					
25592	•	Exterior connector, bottom right/ top left, 645 mm (2'1 13/32"),	1	1	1	1	24028
22055		aluminum, anodized					

Continued table on next page

Continued table on next column

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

1 1 1

Table continued from previous page

<u>IIII</u>	Running track, left, 748 mm (2'5 7/16"), aluminum, anodized	1		1		24744
	Bottom guide channel, left, 748 mm (2'5 7/16"), aluminum, anodized	1		1		24746
	Running track, with left-hand curve piece, 1420 mm (4'7 29/32''), aluminum, anodized	1				24070
	Adapter for running track, plastic, anthra- cite, 4 pieces	1	1	1	1	23645
	Brush guide, plastic, black, set of 3 pieces	1	1	1	1	25815
	Covering screen for door clearance, 1870 mm (6'1 5/8"), aluminum, anodized	1	1			23540
	Soft closing system for end position, with cover caps, plastic, black	1	1	1	1	25887
	Pivot door damper, plastic, anthracite-gray	1	1	1	1	24063
	Upright guide, rattle proof, with plastic rollers	1	1	1	1	25656
Direct Contraction	Stop cover cap, Hawa Folding Concepta, depth adjustable, top left/bottom right	1	1	1	1	27659
	Stop cover cap, Hawa Folding Concepta, depth adjustable, top right/bottom left	1	1	1	1	27660
	Cover plates, stainless steel, 1 pair	1	1			24739
R	Stop bumper adjustable, plastic, anthracite-grey	1	1	1	1	23562

Table continued from previous column

T

Г

	Fixing parts for covering screen for door clearance, of 3 pieces	1	1	1	1	23990
IN STATISTICS	Screw set, 4.5x20 mm, 40 pieces	1	1	1	1	24032
, ¹ / ¹	Screw set, 5x35 mm, 4 pieces	1	1	1	1	24111
	Allen key, with handle, 3 mm (1/8")	1	1	1	1	13164
i i	Rear scissor bearing, right, galvanized steel		1		1	24097
	Interior connector, bottom right, 645 mm (2'1 13/32"), aluminum, anodized		1		1	24022
	Interior connector, top right, 645 mm (2'1 13/32"), aluminum, anodized		1		1	24108
	Running track, right, 748 mm (2'5 7/16"), aluminium, anodized		1		1	24745
	Bottom guide channel, right, 748 mm (2'5 7/16"), aluminium, anodized		1		1	24747
	Running track, with right-hand curve piece, aluminium, anodized		1			24071
	Running track, with left-hand curve piece, 1420 mm (4'7 29/32"), aluminum, black anodized			1		25484
	Covering screen for door clearance, 1870 mm (6'1 5/8 "), aluminum, black anodized			1	1	25567

Continued table on next page

Continued table on next column

Cover plates, stainless steel, black, 1 pair		1	1	25865
 Running track, with right-hand curve piece, 1420 mm (4'7 29/32"), aluminum, black anodized			1	25485

Set for 1 pair of folding doors, door height 1851 to 2600 mm (6' 7/8'' to 8'6 3/8'')

	No.
Hawa Folding Concepta 25, left, aluminum, anodized, for 1 pair of folding doors	27638
Hawa Folding Concepta 25, right, aluminum, anodized, for 1 pair of folding doors	27639
Hawa Folding Concepta 25, left, aluminum, black anodized, for 1 pair of folding doors	27642
Hawa Folding Concepta 25, right, aluminum, black anodized, for 1 pair of folding doors	27643

Set consisting of:		27638	27639	27642	27643	No.
	Scissor action complete, 1500 mm (4'11 1/16"), steel, galvanized	1	1	1	1	22594
	Two-wheeled running gear, height-adjustable, zinc-plated matt	1	1	1	1	24686
ß	Single-wheeled running gear, for folding door, nickel-plated	1	1	1	1	24054
B	Concealed press-fit cup, matt nickel-plated	1	1	1	1	23409
A	Concealed hinge with damper, nickel-plated, 4 pieces	1	1	1	1	27655
B	Centre concea- led hinge, dull nickel finish, set of 4 pieces	1	1	1	1	24218
and and a second	Set of screws for concealed hinges, PH 4x20 mm (25/32")	1	1	1	1	25936

Continued table on next column

Table continued from previous column

A CONTRACTOR	Rear scissor bearing, left, steel, zinc-plated	1		1		24117
	Rear scissor guide, aluminum, anodized	1	1	1	1	25600
	Front scissor guide, aluminum, anodized	1	1	1	1	25592
	Upright, 2500 mm (8'2 7/16"), aluminum, anodized	1	1	1	1	22056
	Connector connecting profile, bottom left/top right, 500 mm (1'7 11/16"), aluminum, anodized	1	1	1	1	24170
	Connector connecting profile, bottom right/top left, 500 mm (1'7 11/16"), aluminum, anodized	1	1	1	1	24171
	Interior connector, bottom left, 645 mm (2'1 13/32"), aluminum, anodized	1		1		24021
	Interior connector, top left, 645 mm (2'1 13/32"), aluminum, anodized	1		1		24107
•	Exterior connector, bottom left/ top right, 645 mm (2'1 13/32"), alu- minum, anodized	1	1	1	1	24027
•	Exterior connector, bottom right/ top left, 645 mm (2'1 13/32"),alu- minum, anodized	1	1	1	1	24028
	Running track, left, 748 mm (2'5 7/16"), aluminum, anodized	1		1		24744

Continued table on next page

1 1 1

Table continued from previous page

	Pottom cuido					
	Bottom guide channel, left, 748 mm (2'5 7/16"), alu- minum, anodized	1		1		24746
	Running track, with left-hand curve piece, 1420 mm (4'7 29/32''), alu- minum, anodized	1				24070
	Adapter for running track, plastic, anthracite-grey, 4 pieces	1	1	1	1	23645
	Brush guide, plastic, black, set of 3 pieces	1	1	1	1	25815
	Covering screen for door clear- ance, aluminum, anodized	1	1			23541
	Soft closing system for end position, with cover caps, plastic, black	1	1	1	1	25887
	Pivot door damper, plastic, anthracite-gray	1	1	1	1	24063
	Upright guide, rattle proof, with plastic rollers	1	1	1	1	25656
	Stop cover cap, Hawa Folding Concepta, depth adjustable, top left/bottom right	1	1	1	1	27659
and the second se	Stop cover cap, Hawa Folding Concepta, depth adjustable, top right/bottom left	1	1	1	1	27660
	Cover plates, stainless steel, 1 pair	1	1			24739
R	Stop bumper adjustable, plastic, anthracite-grey	1	1	1	1	23562
	Fixing parts for covering screen for door clearance, set of 4 pieces	1	1	1	1	24306
1. W.	Screw set, 4.5x20 mm, 40 pieces	1	1	1	1	24032

Table continued from previous column

l'	Screw set, 5x35 mm, 4 pieces	1	1	1	1	24111
	Allen key, with handle, 3 mm (1/8")	1	1	1	1	13164
	Rear scissor bearing, right, galvanized steel		1		1	24097
0	Interior con- nector, bottom right, 645 mm (2'1 13/32"), aluminum, anodized		1		1	24022
	Interior con- nector, top right, 645 mm (2'1 13/32"), aluminum, anodized		1		1	24108
	Running track, right, 748 mm (2'5 7/16"), aluminium, anodized		1		1	24745
	Bottom guide channel, right, 748 mm (2'5 7/16"), aluminium, anodized		1		1	24747
	Running track, with right-hand curve piece, aluminium, anodized		1			24071
Ś.	Running track, with left-hand curve piece, 1420 mm (4'7 29/32"), aluminum, black anodized			1		25484
	Covering screen for door clea- rance, 2620 mm (8'7 5/32"), aluminum, black anodized			1	1	25504
	Cover plates, stainless steel, black, 1 pair			1	1	25865
	Running track, with right-hand curve piece, 1420 mm (4'7 29/32"), aluminum, black anodized				1	25485

Continued table on next column

Base profiles

		mm (inch)	No.
	Base profile, alumi- nium, anodized	1,300 (4' 3 3/16'')	24004
• • • • • • • • • • • • • • • • • • •	Base profile, alu black anodized	1,300 (4' 3 3/16'')	25479

Closing piston for espagnolette lock TERZA Suitable for normal commercial espagnolette locks with a profile bar diameter of 8 mm (5/16").

		No.
	Lock catch and bracket for espagnolette lock, 2 pieces for 1 pair of folding doors	24005


Reinforcement profiles


	mm (inch)	No.
Reinforcement profile, with running track connection plate, aluminum, anodized, pre-drilled	2,600 (8' 6 3/8 '')	24322
Reinforcement profile, without connection plate, aluminium, anodized, pre-drilled	cut to size	24281

Accessories

		No.
8-9-9-2- 2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-2-	Running track connection plate, aluminium, anodized, pre-drilled	24321
	Magnetic centering part, with including drilling jig, aluminum, anodized	24006
	Center joint cover for running track, aluminium, anodized	27781
	Center joint cover for running track, aluminium, black anodi- zed	27782

Fitting depth calculations

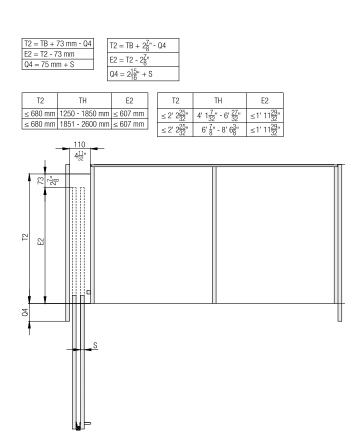


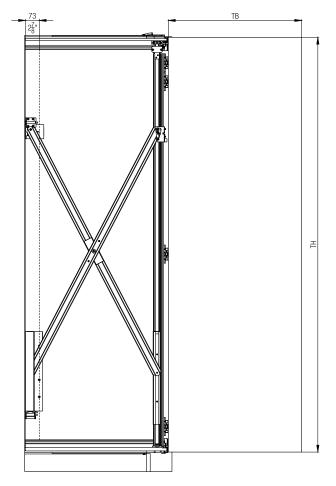


Espagnolette lock installation details


60 2<u>3</u>"

 $\frac{9}{16}$

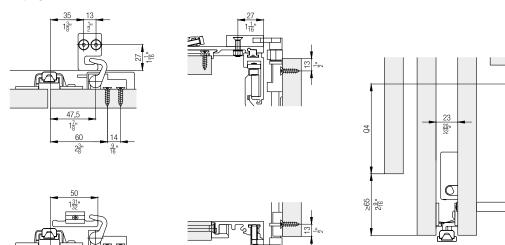


Further installation examples Front-hung cabinet fronts without base profile, 2 and 4 doors

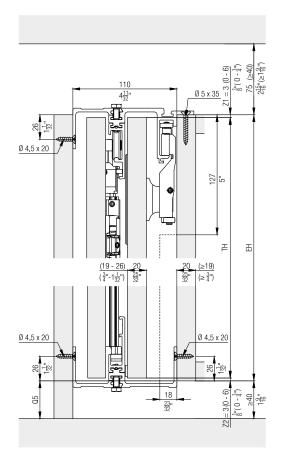


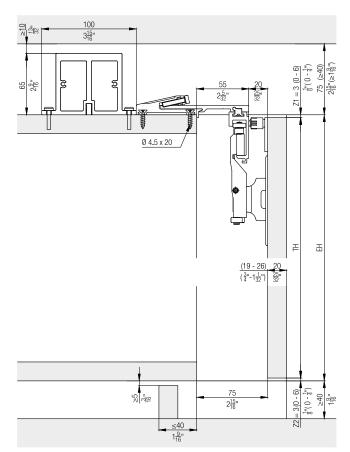


Systems without base profile, 2 and 4 doors

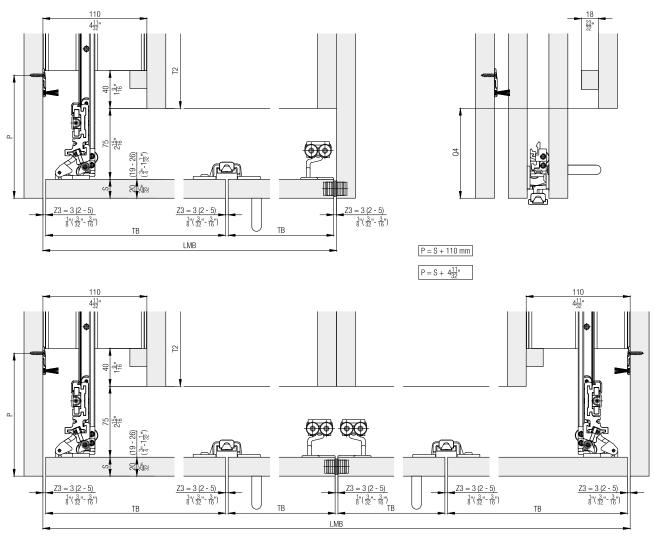



Room-high cabinet fronts, 2 and 4 doors

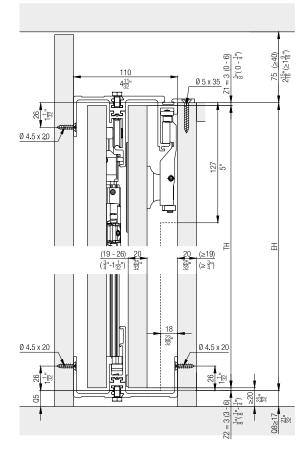

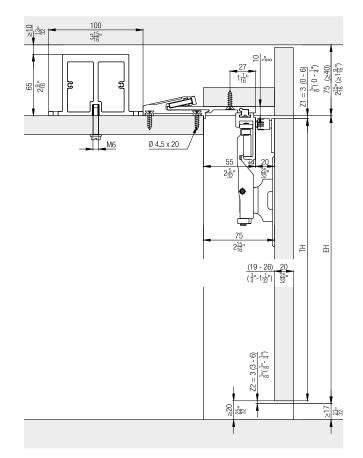

Superstructure cabinet fronts, 2 and 4 doors

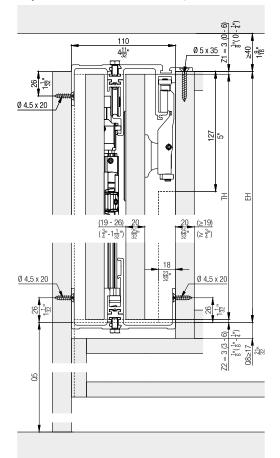

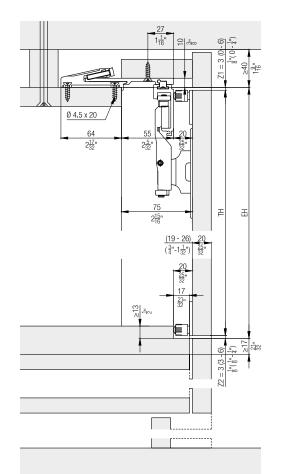

Set for 3-door systems in combination with Hawa Concepta 30/40/50, door height 1851 to 2600 mm (6' 7/8'' to 8'6 3/8'')

	No.
Hawa Folding Concepta 25, left, aluminum, anodized, for 3 doors systems	27644
Hawa Folding Concepta 25, right, aluminum, anodized, for 3 doors systems	27645
Hawa Folding Concepta 25, left, aluminum, black anodized, for 3 doors systems	27646
Hawa Folding Concepta 25, right, aluminum, black anodized, for 3 doors systems	27647

Set consisting of:		27644	27645	27646	27647	No.
	Scissor action complete, 1500 mm (4'11 1/16"), steel, galvanized	1	1	1	1	22594
	Two-wheeled running gear, height-adjusta- ble, zinc-plated matt	1	1	1	1	24686
Ĵ	Single-wheeled running gear, for folding door, nickel-plated	1	1	1	1	24054
ß	Concealed press-fit cup, matt nickel- plated	1	1	1	1	23409
F	Concealed hinge with damper, nickel-plated, 4 pieces	1	1	1	1	27655
	Centre concea- led hinge, dull nickel finish, set of 4 pieces	1	1	1	1	24218
	Set of screws for concealed hinges, PH 4x20 mm (25/32")	1	1	1	1	25936
to a a	Rear scissor bearing, left, steel, zinc-plated	1		1		24117
	Rear scissor guide, aluminum, anodized	1	1	1	1	25600
	Front scissor guide, aluminum, anodized	1	1	1	1	25592

Continued table on next column




Table continued from previous column

-	Upright, 2500 mm (8'2 7/16"), aluminum, anodized	1	1	1	1	22056
	Connector connecting profile, bottom left/top right, 500 mm (1'7 11/16"), aluminum, anodized	1	1	1	1	24170
	Connector connecting profile, bottom right/top left, 500 mm (1'7 11/16"), aluminum, anodized	1	1	1	1	24171
	Interior connec- tor, bottom left, 645 mm (2'1 13/32"), aluminum, anodized	1		1		24021
	Interior connec- tor, top left, 645 mm (2'1 13/32"), aluminum, anodized	1		1		24107
·	Exterior connec- tor, bottom left/ top right, 645 mm (2'1 13/32"), aluminum, anodized	1	1	1	1	24027
•	Exterior connec- tor, bottom right/ top left, 645 mm (2'1 13/32"), aluminum, anodized	1	1	1	1	24028

Continued table on next page

Running track, left, 748 mm (2'5 7/16"), aluminum, anodized	1		1		24744
Bottom guide channel, left, 748 mm (2'5 7/16"), aluminum, anodized	1		1		24746
Running track, with left-hand curve piece, 2120 mm (6'11 15/32") aluminium, anodized	1				24913
Adapter for running track, plastic, anthra- cite, 6 pieces, for cabinet width 1421–2120 mm (4'7 15/16"– 6'11 15/32")	1	1	1	1	24870
Brush guide, plastic, black, set of 3 pieces	1	1	1	1	25815
Covering screen for door clea- rance, aluminum, anodized	1	1			23541
Soft closing system for end position, with cover caps, plastic, black	1	1	1	1	25887
Pivot door damper, plastic, anthracite-gray	1	1	1	1	24063
Upright guide, rattle proof, with plastic rollers	1	1	1	1	25656
Stop cover cap, Hawa Folding Concepta, depth adjustable, top left/bottom right	1	1	1	1	27659
Stop cover cap, Hawa Folding Concepta, depth adjustable, top right/bottom left	1	1	1	1	27660
Cover plates, stainless steel, 1 pair	1	1			24739
Stop bumper adjustable, plastic, anthracite-grey	2	2	2	2	23562
	left, 748 mm (2'5 7/16"), aluminum, anodized Bottom guide channel, left, 748 mm (2'5 7/16"), aluminum, anodized Running track, with left-hand curve piece, 2120 mm (6'11 15/32") aluminium, anodized Adapter for running track, plastic, anthra- cite, 6 pieces, for cabinet width 1421–2120 mm (4'7 15/16"– 6'11 15/32") Brush guide, plastic, black, set of 3 pieces Covering screen for door clea- rance, aluminum, anodized Soft closing system for end position, with cover caps, plastic, black Pivot door damper, plastic, anthracite-gray Upright guide, rattle proof, with plastic rollers Stop cover cap, Hawa Folding Concepta, depth adjustable, top left/bottom left Cover plates, stainless steel, 1 pair	left, 748 mm (2'5 7/16"), aluminum, anodized1Bottom guide channel, left, 748 mm (2'5 7/16"), aluminum, anodized1Running track, with left-hand curve piece, 2120 mm (6'11 15/32") aluminium, anodized1Adapter for running track, plastic, anthra- cite, 6 pieces, for cabinet width 1421–2120 mm (4'7 15/16"– 6'11 15/32")1Brush guide, plastic, black, set of 3 pieces1Covering screen for door clea- rance, aluminum, anodized1Covering screen for door clea- rance, aluminum, anodized1Soft closing system for end position, with cover caps, plastic, black1Stop cover cap, Hawa Folding Concepta, depth adjustable, top left/bottom right1Stop cover cap, Hawa Folding Concepta, depth adjustable, top left/bottom left1Stop bumper adjustable, top right/bottom left1Stop bumper adjustable, top right/bottom left1	left, 748 mm (2'5 7/16"), aluminum, anodized1Bottom guide channel, left, 748 mm (2'5 7/16"), aluminum, anodized1Running track, with left-hand curve piece, 2120 mm (6'11 15/32") aluminium, anodized1Adapter for running track, plastic, anthra- cite, 6 pieces, for cabinet width 1421-2120 mm (4'7 15/16"- 6'11 15/32")1Brush guide, plastic, black, set of 3 pieces11Covering screen for door clea- rance, aluminum, anodized11Soft closing system for end position, with cover caps, plastic, black11Pivot door damper, plastic, altic, black11Stop cover cap, Hawa Folding Concepta, depth adjustable, top left/bottom right11Stop cover cap, Hawa Folding Concepta, depth adjustable, top right/bottom left11Stop bumper adjustable, top right/bottom left11	left, 748 mm (2'5 7/16"), aluminum, anodized111Bottom guide channel, left, 748 mm (2'5 7/16"), aluminum, anodized111Running track, with left-hand curve piece, 2120 mm (6'11 15/32") aluminium, anodized111Adapter for running track, plastic, anthra- cite, 6 pieces, for cabinet width 1421-2120 mm (4'7 15/16"- 6'11 15/32")111Brush guide, plastic, black, set of 3 pieces111Covering screen for door clea- rance, aluminum, anodized111Soft closing system for end position, with cover caps, plastic, black111Upright guide, rattle proof, with plastic rollers111Stop cover cap, Hawa Folding 	left, 748 mm (2'5 7/16"), aluminum, anodized111Bottom guide channel, left, 748 mm (2'5 7/16"), aluminum, anodized111Running track, with left-hand curve piece, 2120 mm (6'11 15/32") aluminium, anodized111Adapter for running track, plastic, anthra- cite, 6 pieces, for cabinet width 1421-2120 mm (4'7 15/16"- 6'11 15/32")111Brush guide, plastic, black, set of 3 pieces1111Covering screen for door clea- rance, aluminum, anodized1111Soft closing system for end position, with cover caps, plastic, black1111Upright guide, rattle proof, with plastic rollers11111Stop cover cap, Hawa Folding Concepta, depth adjustable, top left/bottom left1111Stop cover cap, Hawa Folding Concepta, depth adjustable, top right/bottom left1111Stop bumper adjustable, top right/bottom left11111right/bottom left

Table continued from previous column

	Fixing parts for covering screen for door clearance, set of 4 pieces	1	1	1	1	24306
WAR WAR	Screw set, 4.5x20 mm, 40 pieces	1	1	1	1	24032
17	Screw set, 5x35 mm, 4 pieces	1	1	1	1	24111
	Allen key, with handle, 3 mm (1/8")	1	1	1	1	13164
••••••••••••••••••••••••••••••••••••••	Rear scissor bearing, right, galvanized steel		1		1	24097
	Interior connector, bottom right, 645 mm (2'1 13/32"), aluminum, anodized		1		1	24022
	Interior connector, top right, 645 mm (2'1 13/32"), aluminum, anodized		1		1	24108
	Running track, right, 748 mm (2'5 7/16"), aluminium, anodized		1		1	24745
	Bottom guide channel, right, 748 mm (2'5 7/16"), aluminium, anodized		1		1	24747
	Running track, with right-hand curve piece, 2120 mm (6'11 15/32") aluminium, anodized		1			24914
	Running track, with left-hand curve piece, 2120 mm (6'11 15/32"), aluminum, black anodized			1		25486
	Covering screen for door clear- ance, 2620 mm (8'7 5/32"), aluminum, black anodized			1	1	25504

Continued table on next column

Continued table on next page

Cover plates, stainless steel, black, 1 pair		2	2	25865
Running track, with right-hand curve piece, 2120 mm (6'11 15/32"), aluminum, black anodized			1	25487

For 3-door cabinets, 1 Hawa Concepta 30, 40 or 50 set should also be ordered.

	No.				
Hawa Concepta	27649				
Hawa Concepta	40, for 1 door				27650
Hawa Concepta	50, for 1 door				27651
Set consisting of:					No.
	Upright, 2300 mm (7'6 9/16"), alu plain, anodized	1			24699
	Scissor action, complete, steel, galvanized	1			22593
	Front scissor guide, aluminum, anodized	1	1	1	25592
	Rear scissor guide, aluminum, anodized	1	1	1	25596
e e e	Rear scissor bearing, 55 mm (2 5/32"), steel, galvanized	1	1	1	25855
	Concealed hinge with damper,nickel- plated, 3 pieces	1			27654
	Spacer profile, 860mm (2'9 27/32"), pre-drilled, plastic, black	1	1	1	22861
	Brush guide, plastic, black, set of 3 pieces	1	1	1	25815
	Upright guide, rattle proof, with plastic rollers	2	1	1	25656

Continued table on next column

Table continued from previous column

	C				
Pe	Torsion plate	1			27704
	Bottom guide chan- nel, 896 mm (2'11 9/32"), aluminium, anodized, pre-drilled	2	1	1	24535
A MARINA	Stop damper, with retaining bracket	1	1	1	24660
	Door retractor 30/40, with damper, plastic, black	1	1		25813
	Stop cover cap Hawa Concepta, depth adjustable, top left/bottom right	1	1	1	27657
	Stop cover cap Hawa Concepta, depth adjustable, top right/bottom left	1	1	1	27658
Ë	Cover plates, stain- less steel, 1 pair	1	1	1	24739
	Soft closing system for end position, with cover caps, plastic, black	1	1	1	25862
	Set of screws for concealed hinges, 4x16 mm (5/8"), set of 10 pieces	1	1	1	25935
WWWWW	Screw set, 4,5x20 mm (25/32"), set of 22 pieces	1	1	1	22451
1300000	Set of screws for spacer profile, PH 4x16 mm (5/8"), set of 7 pieces	1	1	1	25562
	Allen key, with handle, 3 mm (1/8")	1	1	1	13164
	Installation aid, plastic, red	1	1	1	25816
	Upright, 2500 mm (8'2 7/16"), aluminum, anodized		1		22056
	Scissor action complete, 1500 mm (4'11 1/16"), steel, galvanized		1	1	22594
	Concealed hinge with damper, nickel-plated, 4 pieces		1		27655


Continued table on next column


Two-wheeled running gear, height-adjustable, with torsion plate, zinc-plated matt	1	1	24955
Running track, 896 mm (2'11 9/32"), aluminium, anodized, pre-drilled	1	1	24528
Upright, 2760 mm (9' 21/32"), aluminium, anodized		1	22057
Concealed hinge with damper, nickel-plated, 5 pieces		1	27656
Door retractor 25/50, with damper, plastic, black		1	25814


Base profiles


		mm (inch)	No.
	Base profile, alumi- nium, anodized	2,000 (6' 6 3/4 '')	25481
• <u>*</u>	Base profile, alu black anodized	2,000 (6' 6 3/4 '')	25480

Espagnolette lock installation details









Reinforcement profiles

		mm (inch)	No.
	Reinforcement profile, with running track connection plate, aluminum, anodized, pre-drilled	2,600 (8' 6 3/8 '')	24322
	Reinforcement profile, without connection plate, aluminium, anodized, pre-drilled	cut to size	24281


Closing piston for espagnolette lock TERZA Suitable for normal commercial espagnolette locks with a profile bar diameter of 8 mm (5/16").

	No.
Lock catch and bracket for espagnolette lock, 2 pieces for 1 pair of folding doors	24005

Г


Accessories

		No.
1000 C	Running track connection plate, aluminium, anodized, pre-drilled	24321
	Magnetic centering part, with including drilling jig, aluminum, anodized	24006
	Center joint cover for running track, aluminium, anodized	27781
	Center joint cover for running track, aluminium, black anodized	27782




Fitting depth calculations


$ \begin{array}{ c c c c c c } \hline T2 = TB + 73 \text{ mm} & -Q4 \\ \hline E2 = T2 - 73 \text{ mm} \\ \hline Q4 = 75 \text{ mm} + S \\ \hline \hline & \\ \hline \hline & \\ \hline \hline & \\ \hline & \\ \hline \hline & \\ \hline \hline \\ \hline & \\ \hline \\ \hline$	T1 = TB - M + 73 mm E1 = T1 - 73 mm	Hawa Concepta 30 Hawa Concepta 40 Hawa Concepta 50	≤ 900 mm	1851 - 2500 mm	300 - 827 mm
$ \begin{array}{ c c c c c c c c c c c c c c c c c c c$	$\begin{array}{c} T1 = TB - M + 2 \overline{Z}_{8}^{n} \\ E1 = T1 - 2 \overline{Z}_{8}^{n} \end{array}$	Hawa Concepta 30 Hawa Concepta 40 Hawa Concepta 50	≤ 2' 11 <u>7</u> "	$6' 0\frac{7}{8}" - 8' 2\frac{7}{16}"$	10 10

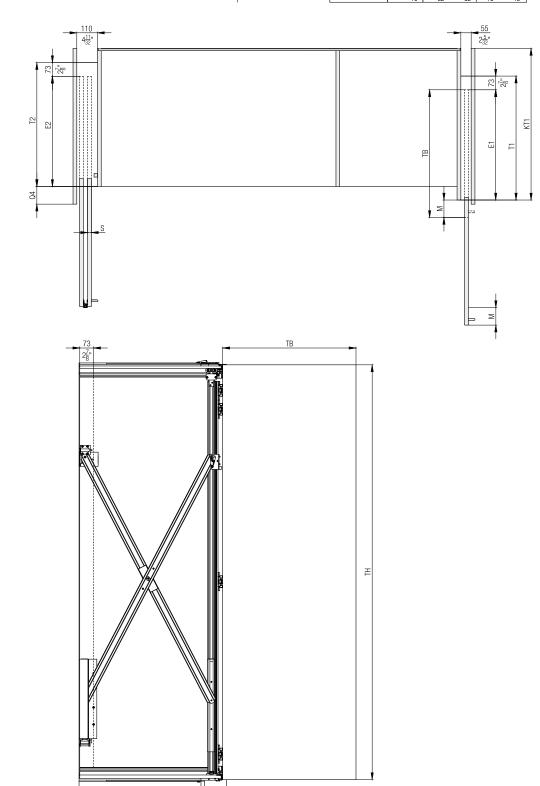


Further installation examples Front-hung cabinet fronts with base profile, 3 doors

2<mark>15</mark>" (≥1<u>16</u>")

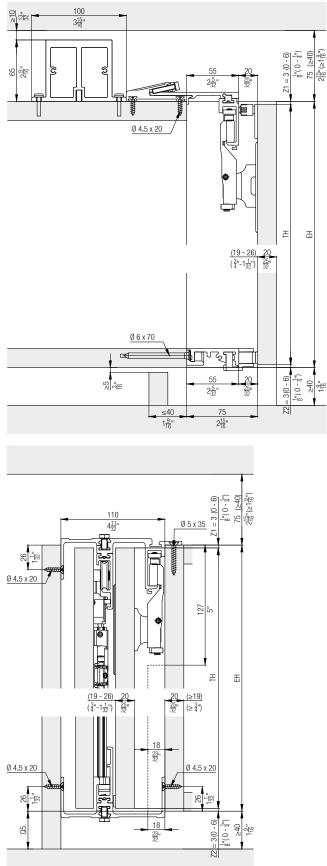


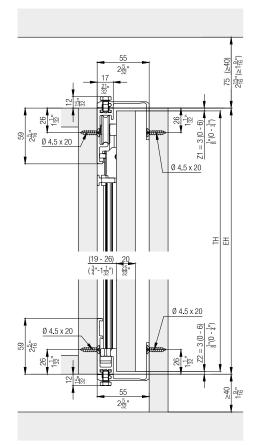


Systems with base profile, 3 doors

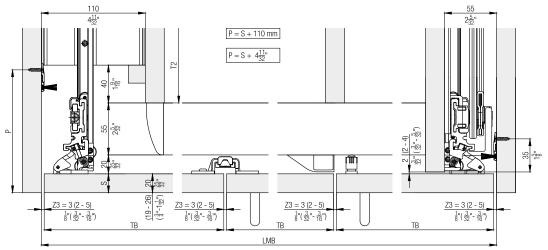

Systems without base profile, 3 doors

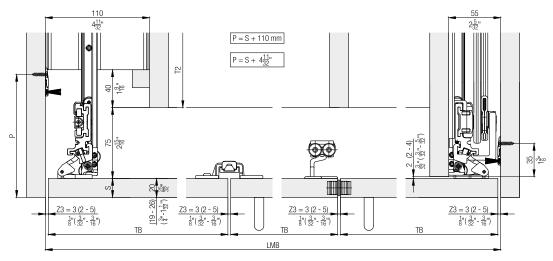


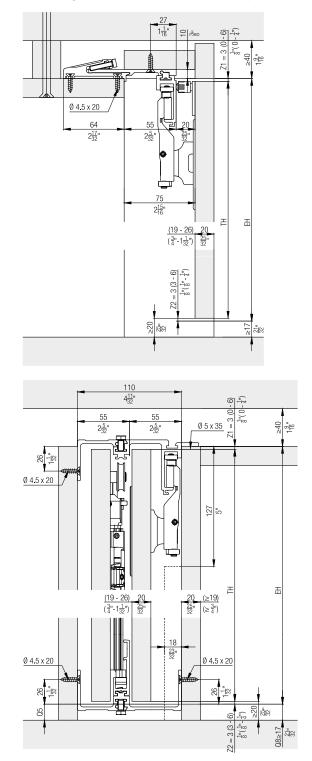

Room-high cabinet fronts without base profile, 3 doors

Accessories

- Straightening fitting from page 266

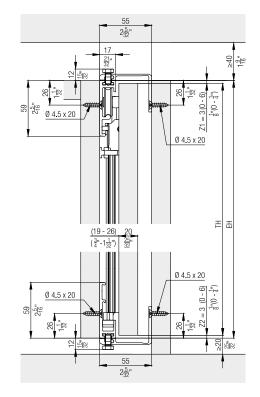

Planning/execution

Configure with just a few clicks on www.foldingconcepta.hawa.com

Further information about the product can be found on www.hawa.com.

For manufacturing reasons, running tracks may have slight colour differences.