

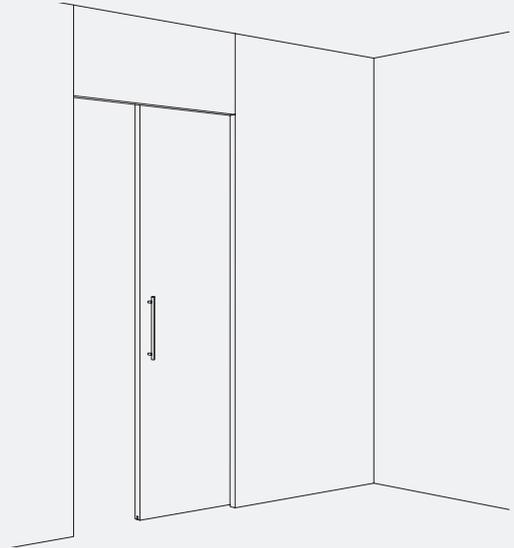
Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall or ceiling mounting.

Product highlights

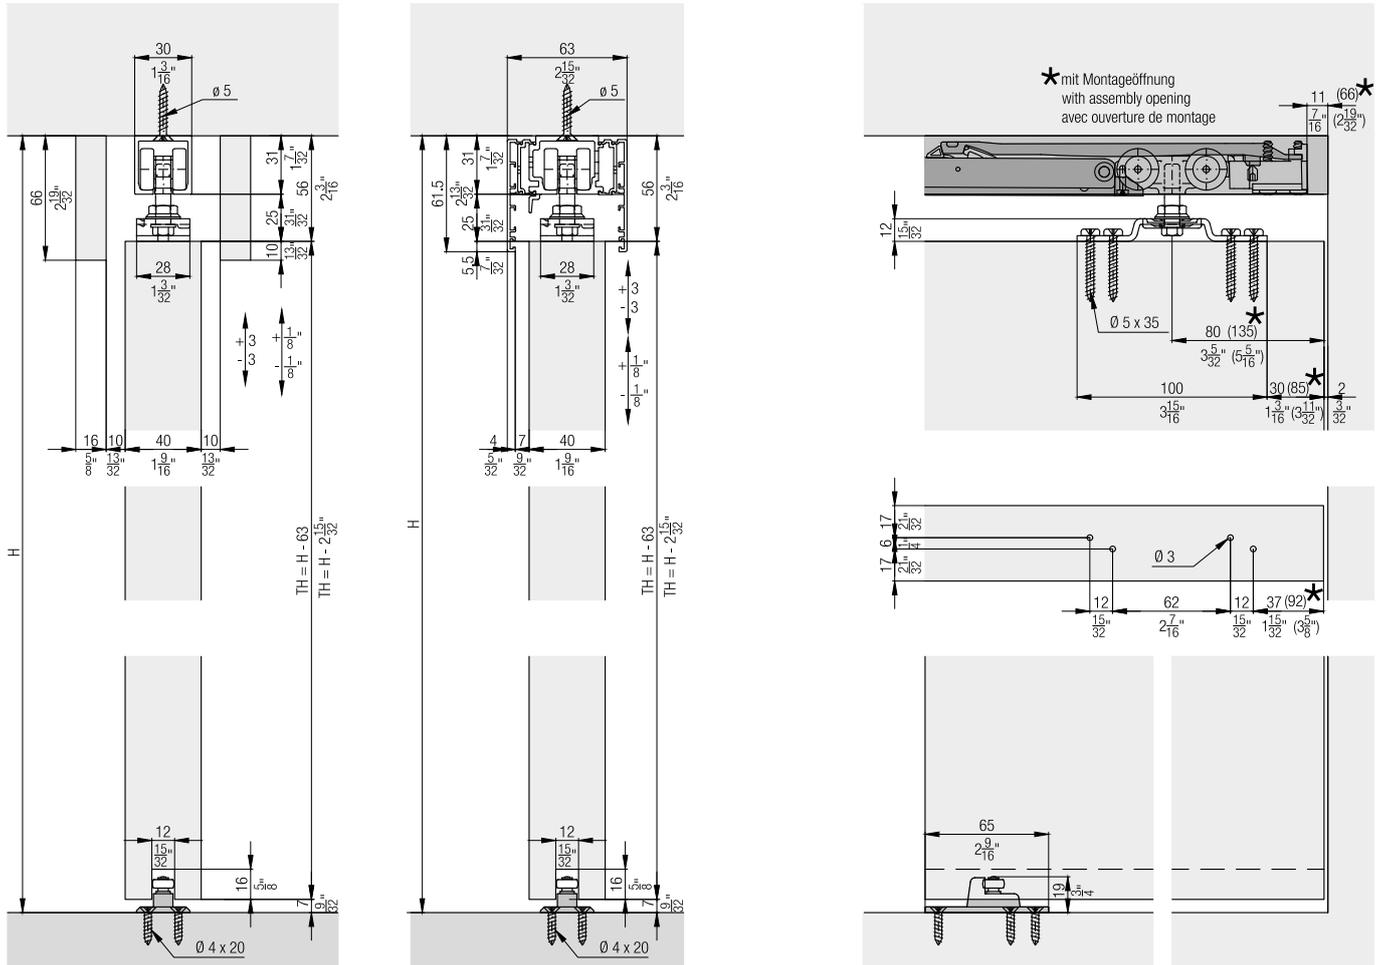
- Flexibility** Ceiling mounting with customer-provided panelling or integrated clip-on panel in aluminium or wood
- Productivity** Retrofitting of all components through the provided assembly opening, prevents contamination during construction work
- Aesthetics** Also available in black as a "Black Edition" design option for a particularly attractive appearance

Technical specifications

- Max. 100 kg (220 lbs.)
- Max. 2700 mm (8'10 5/16")
- Max. 1600 mm (5'3")
- 30–80 mm (1 3/16" to 3 5/32")




Installation examples



**Set for ceiling or wall mounting,  
for 1 wooden door up to 100 kg (220 lbs.)**

	No.
Hawa Porta/Divido 100 H/HC, for 1 door	057.3139.071
Hawa Porta 100 H/HC, black, for 1 door	057.3139.075




**Set consisting of:**

		057.3139.071	057.3139.075	No.
	Running gear, ball bearing, rollers plastic white	2	2	057.3114.071
	Stopper, with retention spring, plastic, gray	2		057.3073.072
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	2	768.9005.101
	Support bracket, height and lateral adjustable, steel, zinc-plated	2	2	057.3129.101
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated	8	8	766.6051.135
	Bottom guide, with roller, adjustable, plastic, anthracite	1	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4		766.5042.120
	Stopper, with retention spring, plastic, black		2	057.3073.076
	Countersunk head screw, 4x20 mm, steel, zinc-plated		4	600.0000.817

**Set for ceiling or wall mounting,  
for 1 wooden door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 H, with running track, 2000 mm (6' 6 3/4"), aluminum, anodized, for 1 door	057.3141.071

**Set consisting of:**

		mm (inch)	057.3141.071	No.
	Running gear, ball bearing, rollers plastic white		2	057.3114.071
	Stopper, with retention spring, plastic, gray		2	057.3073.072
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated		2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated		2	768.9005.101
	Support bracket, height and lateral adjustable, steel, zinc-plated		2	057.3129.101
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated		8	766.6051.135
	Bottom guide, with roller, adjustable, plastic, anthracite		1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		4	766.5042.120
	Track cleaner, plastic, blue		1	057.3099.071
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4")	1	057.3016.201

**Running tracks**

		mm (inch)	No.
	Running track, aluminum, pre-drilled	1,700 (5' 6 15/16")	057.3016.170
		2,000 (6' 6 3/4 ")	057.3016.200
		2,500 (8' 2 7/16")	057.3016.250
		6,000 (19' 8 7/32")	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	057.3016.201
		2,500 (8' 2 7/16")	057.3016.251
		6,000 (19' 8 7/32")	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3016.256
		cut to size	057.3016.998
	Combi running track, aluminum, pre-drilled	1,700 (5' 6 15/16")	057.3048.170
		2,000 (6' 6 3/4 ")	057.3048.200
		2,500 (8' 2 7/16")	057.3048.250
		3,500 (11' 5 25/32")	057.3048.350
		6,000 (19' 8 7/32")	057.3048.600
		cut to size	057.3048.990
	Combi running track, aluminum, black anodized, pre-drilled	2,500 (8' 2 7/16")	057.3048.255
	3,500 (11' 5 25/32")	057.3048.355	
	Disposable cover to running track Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990

**Assembly set**

	No.
Assembly set Hawa Porta 60/100, 2000 mm (6' 6 3/4")	057.3179.200
Assembly set Hawa Porta 60/100, 2500 mm (8' 2 7/16")	057.3179.250
Assembly set Hawa Porta 60/100, 3000 mm (9' 10 1/8")	057.3179.300

		mm (inch)	057.3179.200	057.3179.250	057.3179.300	No.
<b>Set consisting of:</b>						
	Running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1			057.3174.200
	Assembly pin, plastic, gray		9	11	13	057.0201.001
	Countersunk head screw, 5x40 mm (3/16"x1 9/16"), steel, zinc-plated		10	12	14	766.3054.140
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")		1		057.3174.250
	Running track, aluminum, anodized, pre-drilled	3,000 (9' 10 1/8 ")			1	057.3174.300

**Panels**

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16")	042.3004.250
		3,500 (11' 5 25/32")	042.3004.350
		6,000 (19' 8 7/32")	042.3004.600
		cut to size	042.3004.990
		Clip-on panel, aluminum, black anodized	2,500 (8' 2 7/16")
	3,500 (11' 5 25/32")	042.3004.355	

**Clip-on components**

		No.
	Clip component for wooden and aluminum panel, every 500 mm (1'7 11/16''), aluminium, pre-drilled	057.3117.001
	Clip component for wooden and aluminum panel, every 500 mm (1'7 11/16''), aluminum, black anodized, pre-drilled	057.3117.005

**Soft close**  
**For soft closing in opening and closing direction**  
**order 2 sets.**

		No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133–220 lbs.), 1 piece		042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22–132 lbs.), 1 piece		042.3102.072

		042.3102.071	042.3102.072	No.
<b>Set consisting of:</b>				
	Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
	Screw set soft close	1	1	600.0000.566
	Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3106.072

**Cover for assembly opening**

		No.
Cover cap to assembly opening, 1-piece set		042.3114.071

		042.3114.071	No.
<b>Set consisting of:</b>			
	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566

**Bracket set for wall mounting**

		No.
Angle bracket for wall mounting, steel, zinc-plated, 10-piece set		057.3005.172


**Set consisting of:**

		057.3005.172	No.
	Wall mounting angle bracket, steel, zinc-plated	10	057.0169.101
	Countersunk head screw, M5x12 mm (3/16"x15/32''), steel, zinc-plated	10	762.5008.100
	Hexagon nut, M5, steel, zinc-plated	10	768.9025.100

**Bottom guide set for wall mounting**

		No.
	Set bottom guide for wall mounting, with roller	057.3128.171

**Accessories**

		No.
	Routing jig for assembly opening	042.3118.071
	Groove cutter to routing jig, Ø= 10 mm (13/32''), hard metal	600.0000.309
	Track cleaner, plastic, blue	057.3099.071

