

Technical Data Sheet



Eclectic Products, Inc.
Manufacturing Facility
101 Dixie Mae Drive
Pineville, Louisiana
eclecticproducts.com
800.349.4667

ISO 9001:2015
Compliant
Quality Management
Systems

Administration Office
Eugene, Oregon
eclecticproducts.com
800.693.4667

UNITED STATES/MEXICO



Net Wt 6 oz
Net Wt 24 oz
Gallon

Not all styles/sizes/colors available in all areas.

CANADA

FAMOWOOD Latex Wood Filler | USA/CAN/MEX/EU/ME | Rev 10

FAMOWOOD LATEX WOOD FILLER



PRODUCT DESCRIPTION

First choice of woodworking professionals for more than 70 years! Whether you are masking small or large defects, FAMOWOOD can be used inside or outside and takes stains and paints evenly, making it ideal for any custom project. FAMOWOOD spreads evenly into crack and holes without shrinking, crumbling or cracking. In addition, FAMOWOOD requires very little sanding to achieve a desired finished look.

WHERE TO USE / APPLICATIONS

Use to fill cracks or holes in wood. Spread evenly into cracks or hole, let dry and sand smooth to surface repaired. Paint or stain to match wood surface.

FEATURES AND BENEFITS

LOW ODOR/EASY CLEAN-UP – latex formula

ACTS LIKE REAL WOOD – saw, drill, sand, plane and nail

INTERIOR/EXTERIOR – use indoors or outdoors

WON'T CRACK OR SHRINK – spread evenly into cracks and holes without crumbling or cracking

SUPERIOR STRENGTH – hard finish with little or no shrinkage

QUALITY FINISH – takes stains and paints evenly with minimal sanding



Technical Data Sheet

FAMOWOOD LATEX WOOD FILLER



Net wt. 144 g (10 colors)

Net wt. 576 g (3 colors)

Net wt. 5000 g (4 colors)

Not all styles/sizes/colors available in all areas.

MIDDLE EAST (ARABIC)




Net wt. 144 g (6 colors)

TECHNICAL INFORMATION

PHYSICAL PROPERTIES	
Colors (10):	Birch, Cherry/Dark Mahogany, Fir/Maple, Golden Oak, Natural, Oak, Red Oak, Walnut, White, White Pine
Density:	15.0 – 16.0 lbs/gal
Solids:	82% +/- 2.0% (by weight)
Viscosity:	650,-000 – 1,000,000 cP
Application Temperature:	40 to 90 °F (4 to 32 °C)
Service Temperature:	10 to 150 °F (-12 to 66 °C)
Storage Temperature:	Store between 45 and 85 °F (7 and 29 °C)
Freeze/thaw stability:	Freeze/thaw stability: It is recommended to keep the product from freezing whenever possible. If the product should freeze, it is stable and re-workable up to three freeze cycles. Allow product to warm to room temperature and stir or knead completely before using.
Shelf life:	1 year

TEST RESULTS: FAMOWOOD vs. COMPETITION

APPLIED FORCE NEEDED TO CAUSE WOOD FILLER POP OUTS

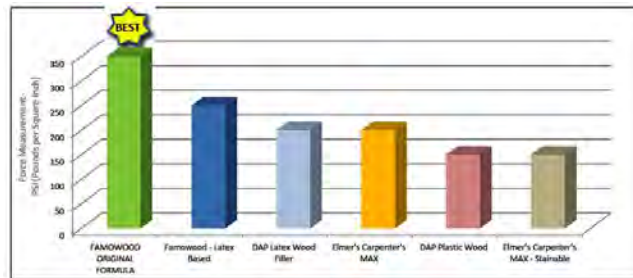

BETTER ADHESION = NO POP OUTS!

Psi (pounds per square inch). ASTM D 4541-93. Average adhesion strength in a ¼" deep x 2" diameter defect (Average of 5 samples).

STAINABILITY

Wood Filler	Stain Quality
FAMOWOOD ORIGINAL FORMULA	Stains Well
FAMOWOOD LATEX BASED	Stains Well
DAP Plastic Wood	Stains Well
Elmer's Carpenter's MAX – Stainable	Stains Well
DAP Latex Wood Filler	Resists Stains
Elmer's Carpenter's MAX	Resists Stains

DIRECTIONS and APPLICATION NOTES

Always test a small area before full use.

- Step 1 Surface must be clean and dry.
- Step 2 Do not apply below 40 °F / 4 °C.
- Step 3 Allow contents to dry thoroughly before sanding (approx. 30 minutes).
- Step 4 Wear dust mask.
- Step 5 Accepts most water-based and oil-based stains.

NOTE: TEST STAIN COMPATABILITY BEFORE USE.

- Step 6 For deep repairs: allow 1st layer to dry before applying subsequent layers.
- Step 7 Replace lid tightly.
- Step 8 KEEP FROM FREEZING.

Adjusting Color: A universal colorant can be used to modify the color of Famowood Latex

Wood Filler as long as the colorant is universal, water-based, dry and/or in quantities that are small enough that the addition doesn't substantially change the consistency of the filler. Test small amount in an inconspicuous area of the substrate to test mixture before use.

HEALTH and SAFETY

Before working with this product, read and become familiar with information concerning hazards, proper use and handling.

To request a hard copy of the SDS, please send an e-mail to sds@eclecticproducts.com.

⚠WARNING: This product can expose you to chemicals including wood dust which is known to the State of California to cause cancer. For more information go to www.p65warnings.ca.gov.

LIMITED WARRANTY

The product is warranted against any defect in materials or workmanship under normal use for a period of 180 days after the date of purchase. The product is also warranted under any implied warranties provided under applicable state law, including, without limitation, the implied warranty of merchantability and the implied warranty of fitness for a particular purpose, for a period of 180 days after the date of purchase. This warranty covers only the original buyer of the product. For warranty service, the buyer should contact the store where the product was purchased, or write Eclectic Products, Inc., P.O. Box 4450, Pineville LA 71361 or call 800.767.4667. This warranty gives you specific legal rights, and you also have other rights, which vary from state to state.