






Two options














79" (2 m) starter cords molded on each end for easy installation









No soldering required!



DIY accessories feature distinctive plastic teeth to ensure secure and reliable connections for indoor and damp locations



IP65 Rated for use in indoor, outdoor*, damp and wet* locations

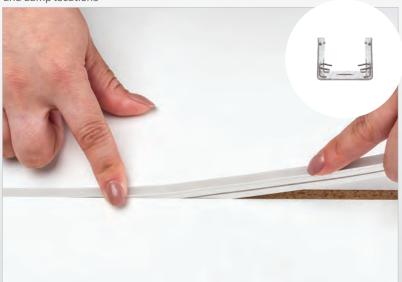

Easily press into a groove for recess mounting or surface mount with U-Clips



Molded ends fit within groove for seamless installation















Features:

Durable, flexible silicone construction

3W/ft. Luniform output for continuous illumination

Available in (5) color temperatures: 2700K, 3000K, 3500K, 4800K, 6500K

12VDC sold in 16.4' (5 m) rolls; 24VDC sold in 26.25' (8 m) rolls

Linkable with DIY connectors - no soldering required!

79" (2 m) starter cords are molded on each end for easy installation

Groove for recess mounting or surface mount with U-Clips in indoor, outdoor*, damp and wet* locations

*When used with factory-installed inputs

Typical Applications

TOP-EMITTING

Soffit lighting

Toe Kick lighting

Cove lighting

Stairways

Patios/Decks/Pathways

Accent lighting

Store fixtures

SIDE-EMITTING

Millwork

Accent lighting

Furniture

Shelving

Closets (UL listed for use within closet storage spaces)

TOP-EMITTING

3W/ft.

(9.8W/m)

(656 per meter)



SIDE-EMITTING

3W/ft.

(9.8W/m)





1-800-227-1171 trescolighting.com