

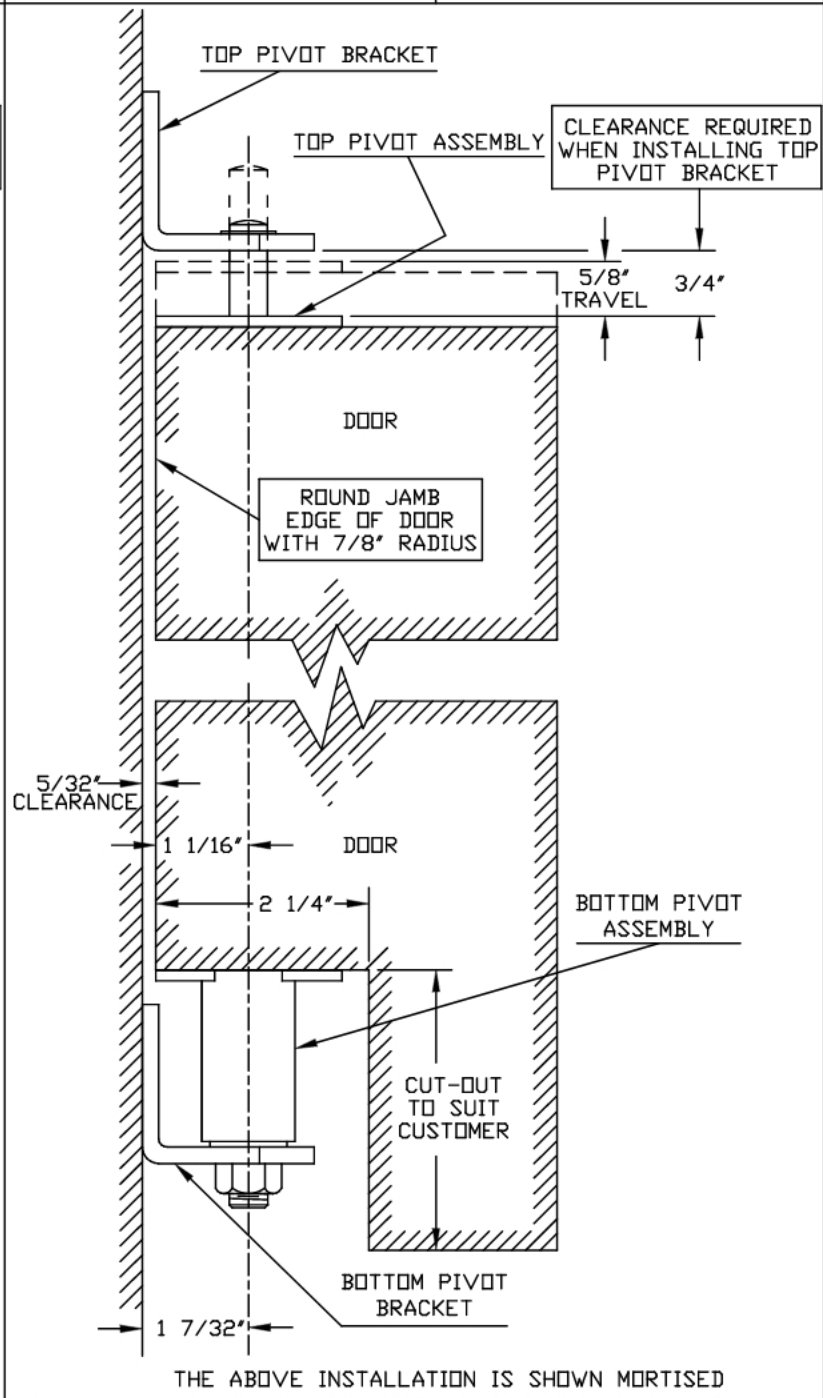
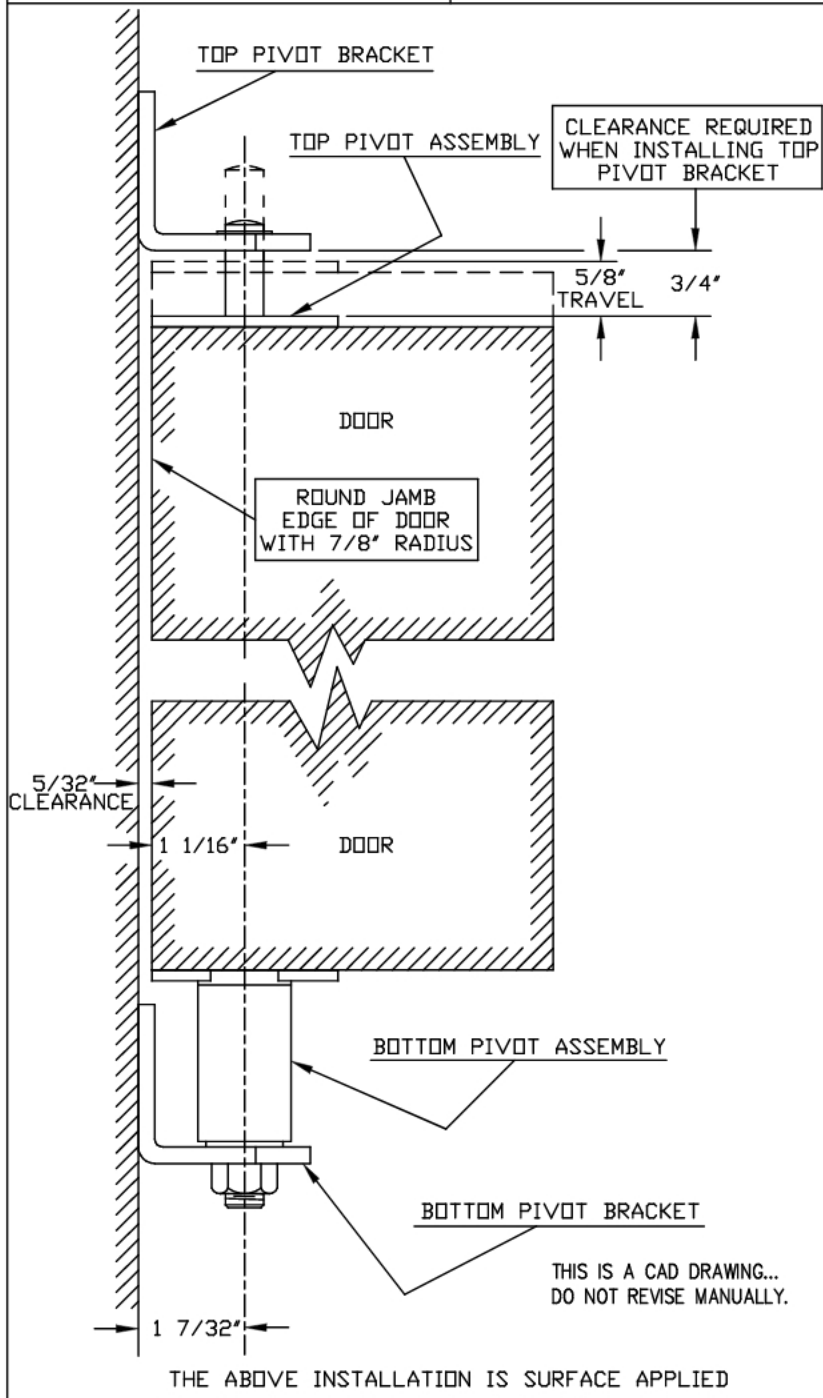
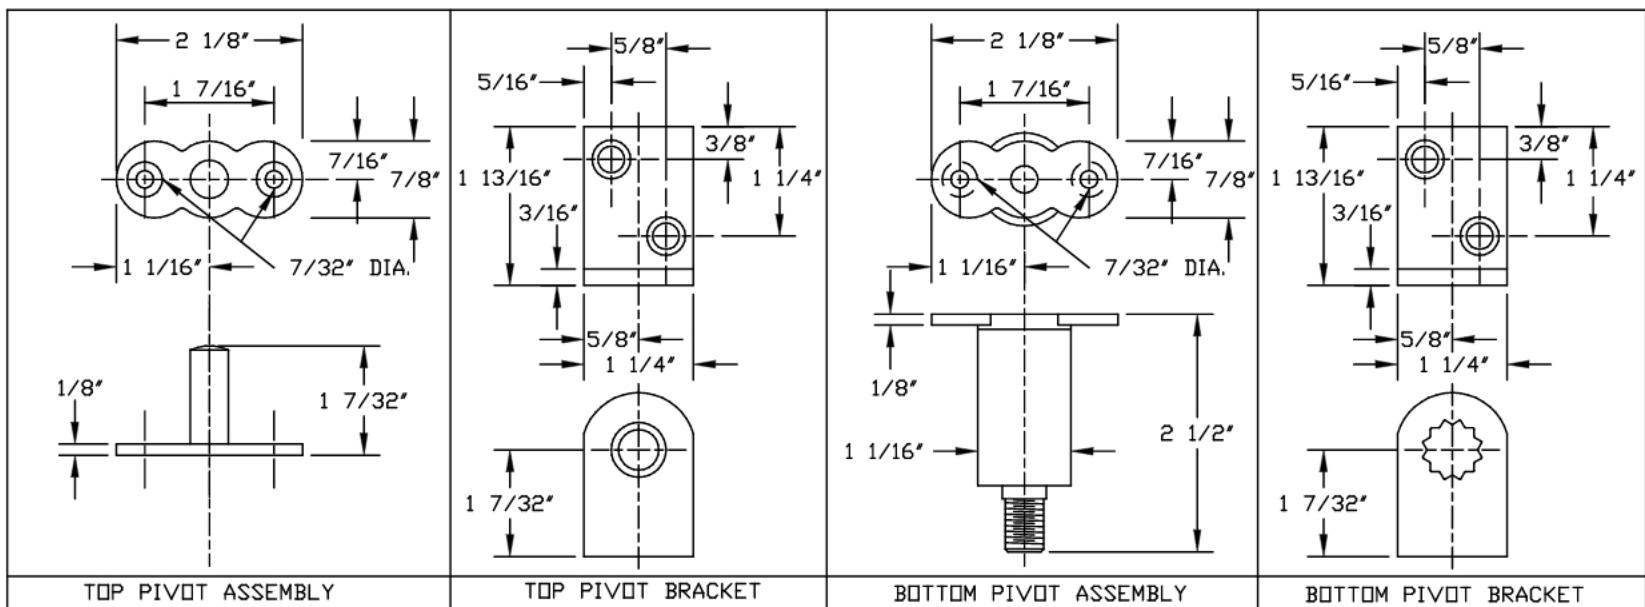


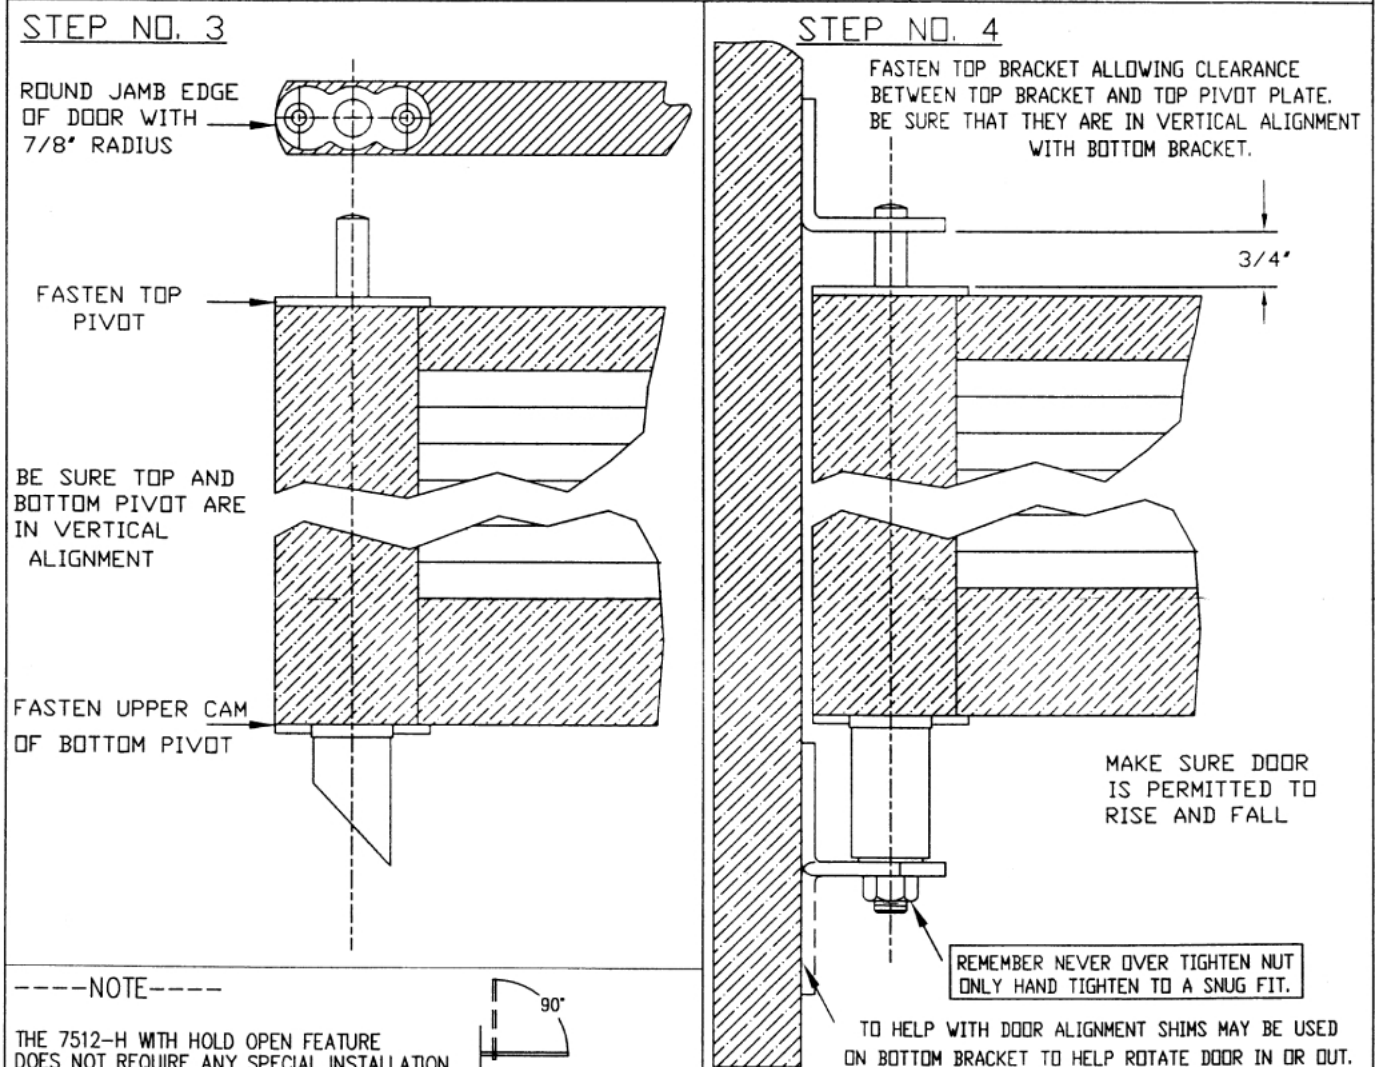

DOOR	SCREWS	NOTE	PBB ARCHITECTURAL ONTARIO, CA			
MAXIMUM WIDTH: 30" MAXIMUM WEIGHT: 50 LB. MAXIMUM THICKNESS: 7/8" TO 1 5/8"	TOP AND BOTTOM PIVOT ASSY. No. 10 x 1" F.H.W.S. (4) 10-24 x 1/2" F.H.M.S. (4) TOP AND BOTTOM BRACKET No. 10 x 1 1/4" F.H.W.S. (4) 10-24 x 1/2" F.H.M.S. (4)	DOOR THICKNESS 7/8" TO 1 5/8" *PIVOT EDGE OF DOOR WILL HAVE TO BE ROUNDED TO 7/8" RADIUS FROM THE PIVOT CENTER LINE TO CLEAR JAMB	TYPE : LOUVER DOOR GRAVITY PIVOT DOUBLE ACTING PART NO.: 7512 AND 7512-H			
			Drawn by : Approved by :	DATE 09 AUG 22	SCALE N.T.S.	DRAWING NUMBER 7512 REV. A

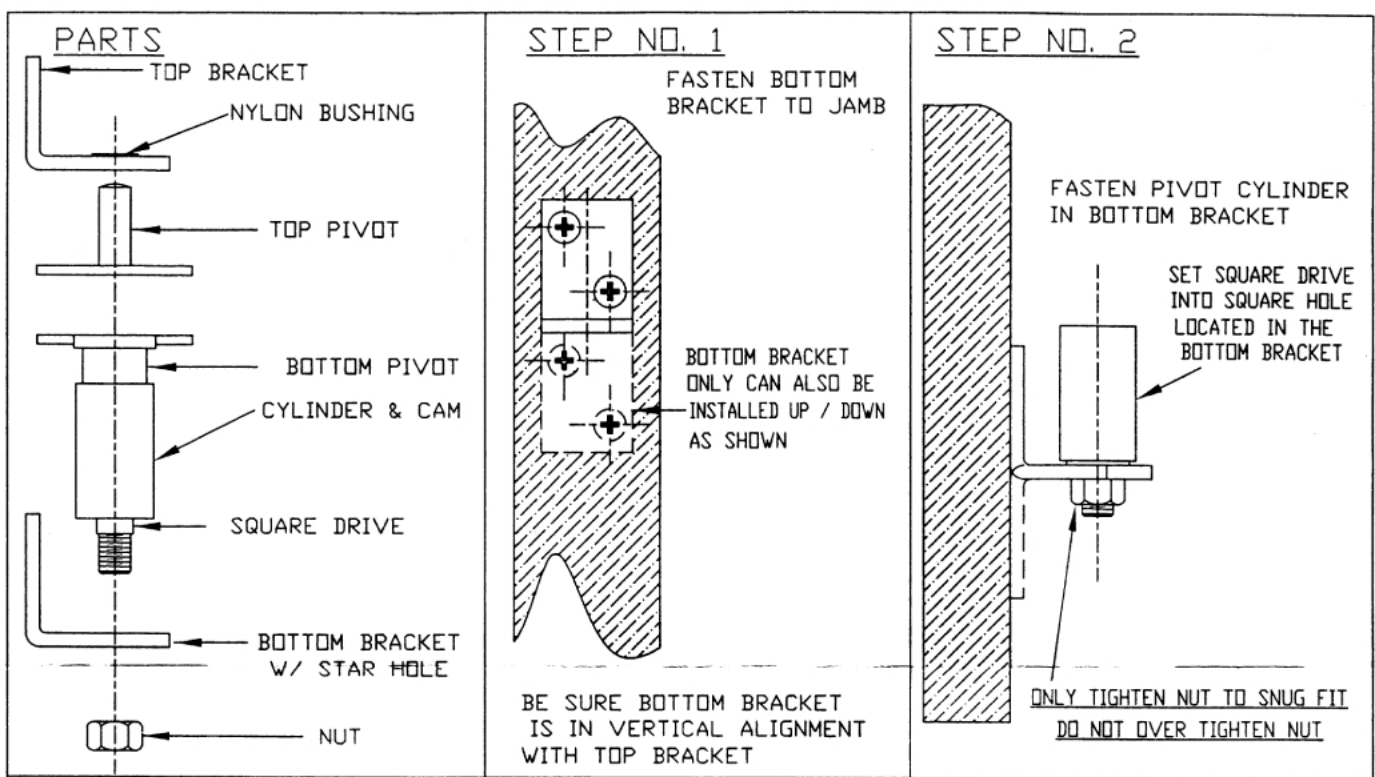

-----NOTE-----

THE 7512-H WITH HOLD OPEN FEATURE DOES NOT REQUIRE ANY SPECIAL INSTALLATION. THE HOLD OPEN FEATURE IS ON THE CAM AND HOLDS DOOR WHEN OPENED TO AT LEAST 90°. TO RELEASE DOOR, PUSH DOOR WITH AN EASY PUSH. 7512 AND 7512-H ARE DOUBLE ACTING AND ARE CAPABLE OF 180° PLUS OPENING.

DOOR THICKNESS
7/8" TO 1 5/8"

90°

PBB ARCHITECTURAL ONTARIO, CA			
TYPE :	LOUVER DOOR GRAVITY PIVOT		
PART NO.:	7512 AND 7512-H		DOUBLE ACTING
Drawn by :	DATE 14 MAR 2022	SCALE N.T.S.	DRAWING NUMBER 865661 REV. B